

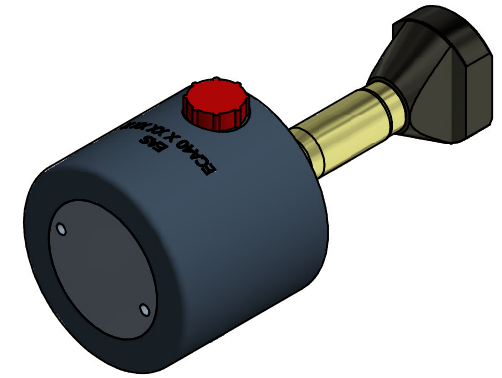
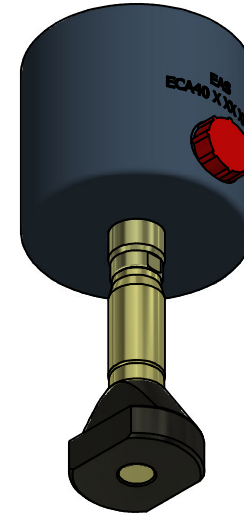
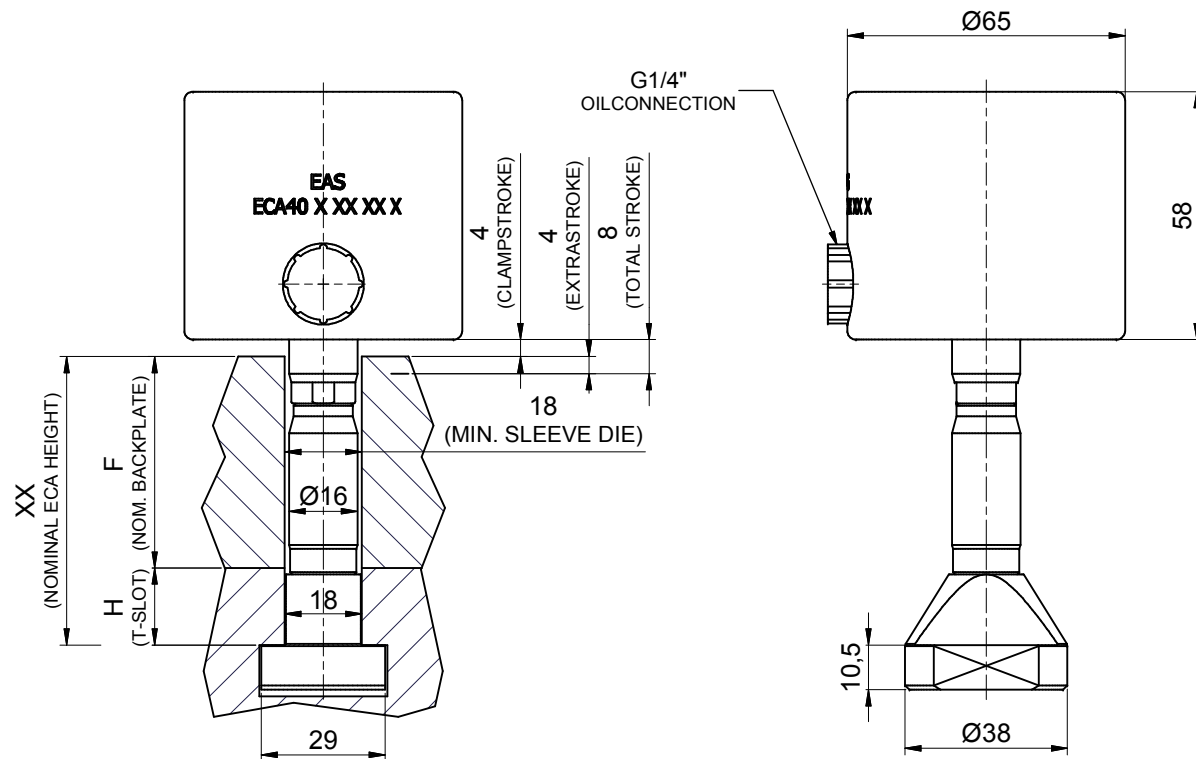




ECA-40-18-XX:

CLAMPFORCE at 350 bar = 36,5 kN
TOTAL STROKE = 8 mm



TOLERANCES ON DIMENSIONS UNLESS SPECIFIED ± MM[inch]						TOL. ON ANGLES UNLESS SPEC.	TOL. ON RADII UNLESS SPEC. ± MM[inch]			
SIZE	0.5-6 [.02-.24]	6-30 [.24-1.18]	30-120 [1.18-4.72]	120-315 [4.72-12.40]	315-1000 [12.40-39.37]		SIZE	0.5-3 [.02-.12]	3-6 [.12-.24]	6-30 [.24-1.18]
TOL.	0.1 [.004]	0.2 [.008]	0.3 [.012]	0.5 [.02]	0.8 [.03]		± 1°	TOL.	0.2 [.008]	0.5 [.02]
SPECIFICATIONS			DIMENSIONS IN BRACKETS ARE IN [INCH]			EAS® CHANGE SYSTEMS				
WEIGHT: ± 1.562 kg			NO CHANGE, NO PROGRESS							
			3,2 FINISH UNLESS SPECIFIED √ Ra_{μm} [Raμ]							
			SCALE 1 : 1.25							
ALL ANGULAR DIMENSIONS ARE ± 1° UNLESS SPECIFIED						DESCRIPTION T-SLOT PULL CYLINDER ASS'Y				
GROUP TECH. CODES	C.			DO NOT SCALE DRAWING	DR. Yue CH.	DATE 2020/4/14	DRAWING NO. ECA-40-18-XX		Rev	9/02
	M.									A3